


**SECTION A-A**

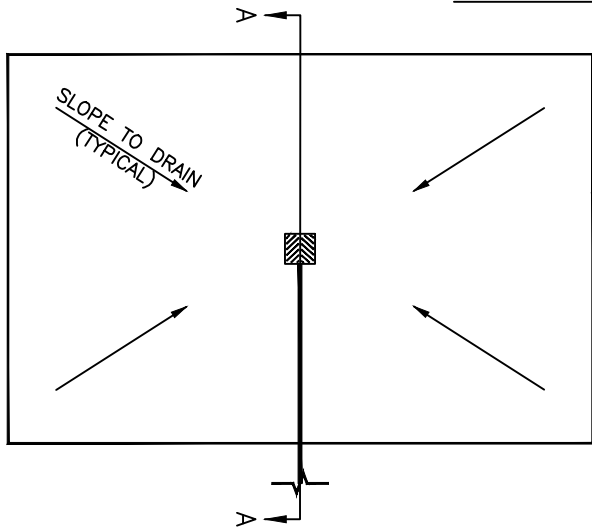

**PLAN**

UNCOVERED PAVED SERVICE AREA GRADED TO DRAIN SHALL NOT EXCEED 200 SQUARE FEET. AREAS OVER 200 SQUARE FEET REQUIRE ROOF CANOPY, WITH ROOF DRAINING TO STORM SYSTEM.

**NOTES:**

1. DUMPSTER DRAIN CONNECTION ONLY ALLOWED WHEN AUTHORIZED AND PERMITTED BY THE DISTRICT. CONTACT PERMITS@NUD.NET TO OBTAIN AUTHORIZATION AND FOR PERMITTING.
2. ALL PIPE SHALL BE ABS, SCHEDULE 40, SOLVENT WELD UNLESS OTHERWISE NOTED.
3. ALL FITTINGS SHALL BE ABS, HUBxHUB.
4. TRANSITION FROM ABS PIPE TO PVC PIPE SHALL BE MADE WITH A STRONG BACK FERRO COUPLING ADAPTER.

**DUMPSTER DRAIN**

NOT TO SCALE

**DETAIL APPROVALS**  
**EDITOR** TMC  
**MANAGER** EM

**NORTHSHORE UTILITY DISTRICT**  
 2024 STANDARD SEWER DETAILS