


NOTES:

1. SIDE SEWERS THAT WILL NOT BE REUSED SHALL BE ABANDONED PERMANENTLY AT THE MAIN AND CAPPED WITH AN APPROVED WATERTIGHT, GASKETED CAP.
2. ALTERNATIVELY, THE SIDE SEWER CAN BE PERMANENTLY ABANDONED UTILIZING A CURED IN-PLACE PIPE (CIPP) SPOT REPAIR SLEEVE INSTALLED BY DISTRICT CREWS, AT PROPERTY OWNER'S EXPENSE. CONTACT NUD PERMIT DESK AT (425) 398-4401 FOR COST AND AVAILABILITY.
3. SIDE SEWERS THAT WILL BE REUSED SHALL BE ABANDONED TEMPORARILY WITH AN APPROVED WATERTIGHT, GASKETED CAP AT THE END OF THE 6" STUB AT THE PROPERTY LINE. INSTALL A 2"x4" MARKER AT THE END OF THE STUB.
4. PAINT PORTION OF SERVICE MARKER THAT IS ABOVE GRADE WITH WHITE PAINT. STENCIL "S/S" WITH 3" TALL BLACK LETTERS.

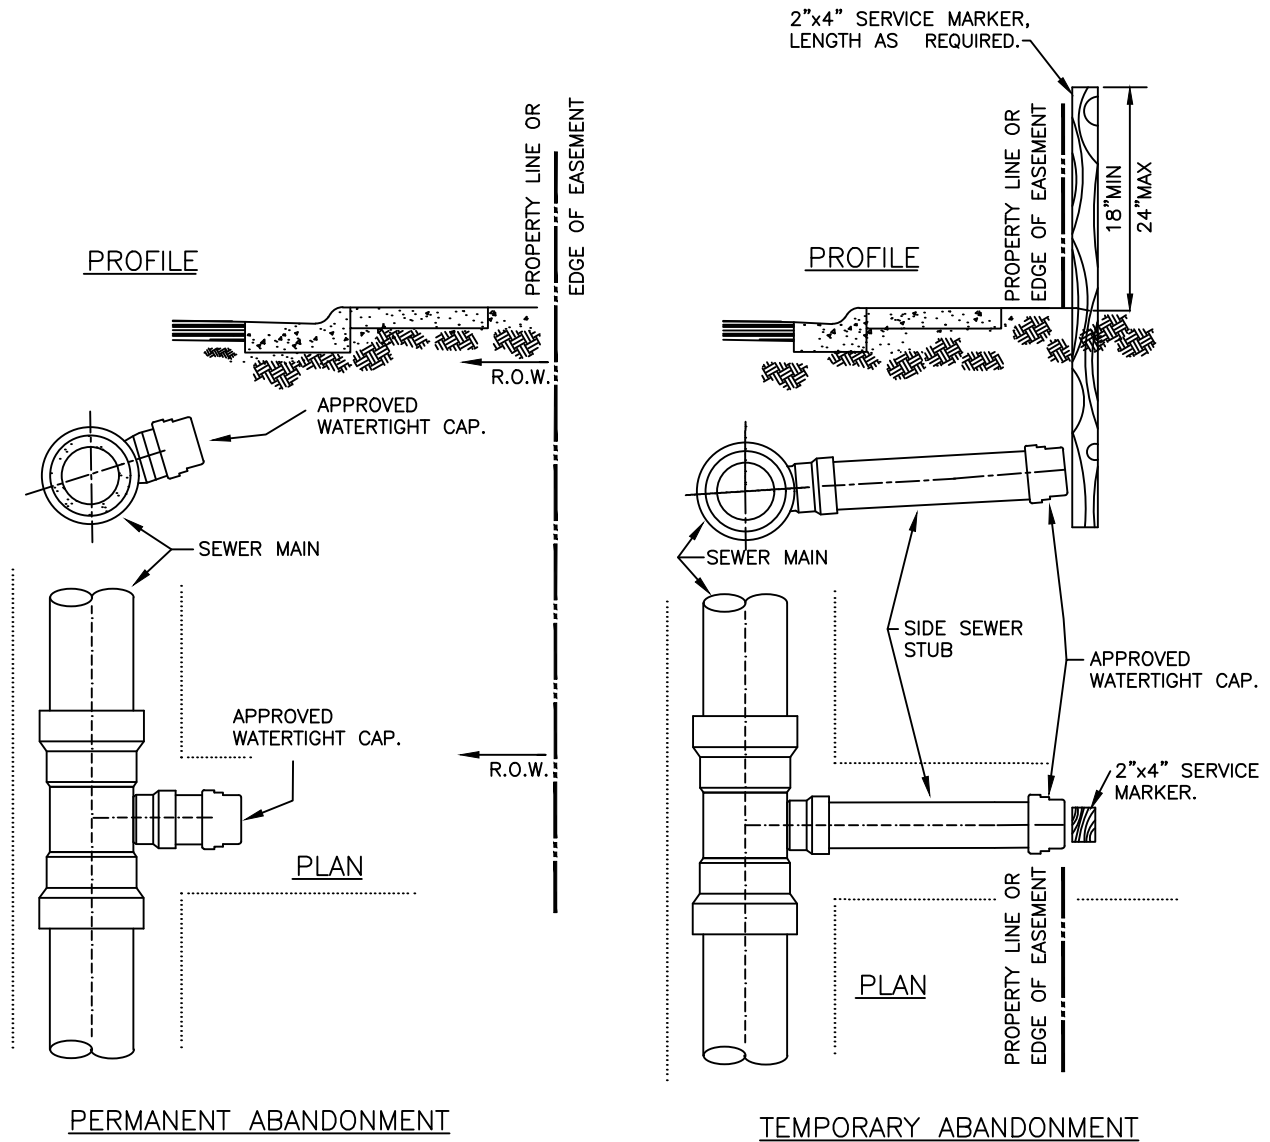

SIDE SEWER CAPPING

NOT TO SCALE

DETAIL APPROVALS	
EDITOR	TMC
MANAGER	SJD

NORTHSHORE UTILITY DISTRICT
 2023 STANDARD SEWER DETAILS

8c
 LAST UPDATED
 APRIL 2021