


### VALVE BOX COVER

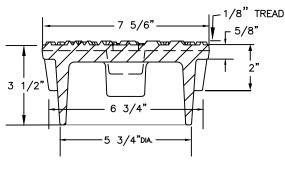

SECTION A-A

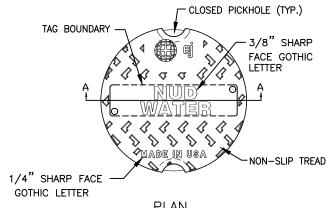

**PLAN** 

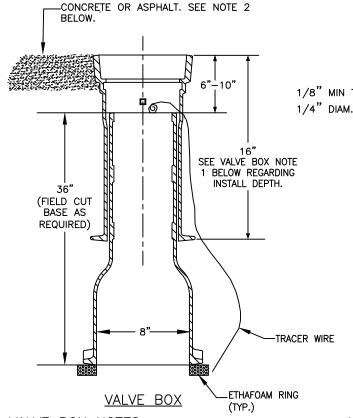

2" SQUARE OPERATOR. 1/8" MIN THICKNESS x 4 STEEL STOCK (LENGTH AS REQUIRED). 2 1/4" CUBE (INSIDE MEASUREMENT) x 1/8" MIN THICKNESS, WITH 3/8" SET SCREW.

VALVE OPERATING NUT EXTENSION

## VALVE BOX NOTES:

- CAST-IRON VALVE BOX AND COVER SHALL BE EAST JORDAN IRON WORKS: VALVE BOX COVER 06800209, VALVE BOX TOP 85557016U, AND VALVE BOX BOTTOM 85556036U. FOR SHALLOW OR DEEP INSTALLS, VALVE BOX TOP SHALL BE DETERMINED BY THE DISTRICT.
- 2. IF VALVE BOX IS IN AN UNPAVED AREA, PROVIDE 1' RADIUS x 4" MINIMUM DEPTH CONCRETE OR ASPHALT PAVING AROUND VALVE BOX. CONCRETE SHALL HAVE A BROOM/TROWEL FINISH.
- 3. INSTALL ETHAFOAM RING BETWEEN BASE OF VALVE BOX AND GATE VALVES OR ON CONCRETE BRICKS FOR BALL VALVES. ETHAFOAM RING TO BE 2" IN THICKNESS.

## VALVE OPERATING NUT EXTENSION NOTES:

- VALVE OPERATING NUT EXTENSIONS ARE REQUIRED WHEN VALVE NUT IS MORE THAN 5' BELOW FINISHED GRADE.
- LENGTH AS REQUIRED TO PUT OPERATING NUT TWO (2) FEET FROM FINISHED GRADE.
- EXTENSIONS TO BE A MINIMUM OF TWO (2) FEET
- ONE (1) EXTENSION PER VALVE.
  NO ADJUSTABLE VALVE EXTENSIONS ALLOWED.
- WHEN AN EXTENSION IS REQUIRED, USE A SOILS PIPE BETWEEN VALVE BOX TOP AND VALVE BOX BOTTOM. LENGTH TO FIT.

# VALVE BOX & OPERATING NUT EXTENSION

**DETAIL APPROVALS** 

**EDITOR TMC** MANAGER SJD

# NORTHSHORE UTILITY DISTRICT

2023 STANDARD WATER DETAILS



FEBRUARY 2022